




Excellent thermo-stress craze resistance

**Example of irradiance transmission through the tubing FEP material**

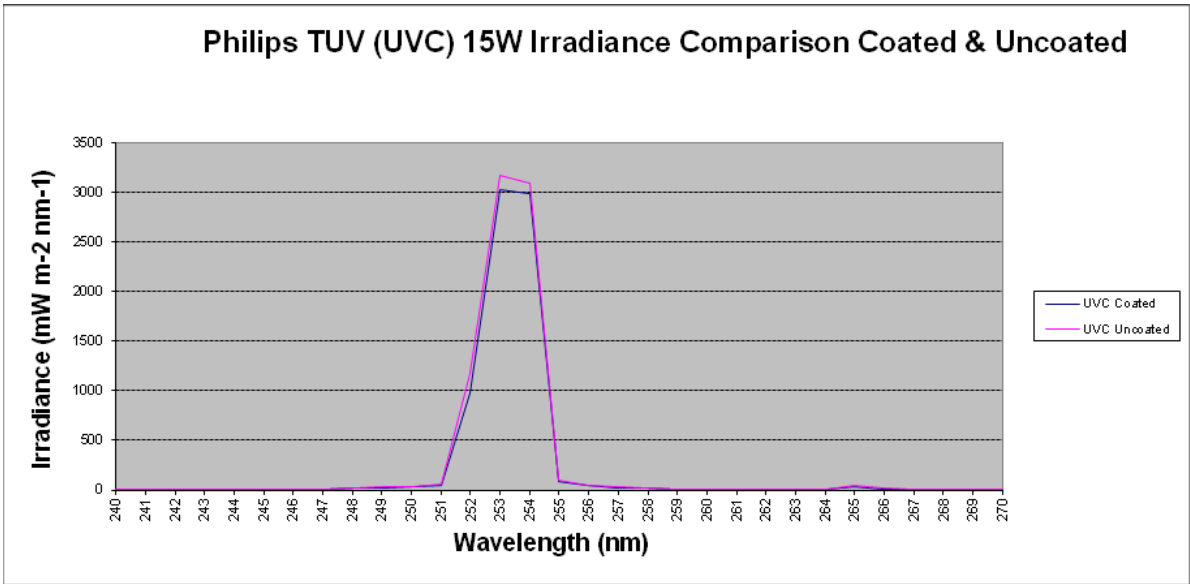

**Sleeve Specification**

Wall thickness after application to T10 fluorescent lamp Min 320u (Nominal 330u Max 360u)

Supplied Lay Flay 52mm

Shrinking temperature range recommendation 110° - 150°C

Continuous reel size norm 100m.

Larger reels sizes upon request.

W2000 K0000  
&0000 K0000